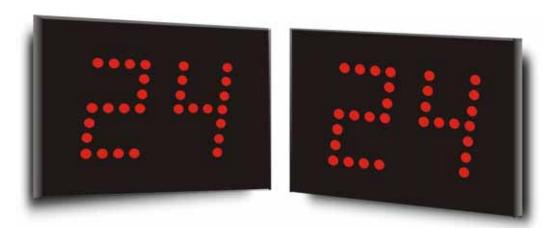# Shot Clock D-SC20

This system consists of two shot clocks, and one operation terminal with two buttons. The system works only together with the ALGE-score boards of the series D.

Functions:
- Displays 'Time-out' time
- A horn signal at main scoreboard automatically sounds when the shot timer reaches zero
- Displays 'Time-out' time
- Power not required at displays
- All modularized design, simple replacement
- Protected digits with metal surround - protective covers not needed
- All factory pre-wired connectors

Technical Data:

Digit:	0 - 99 seconds, figure height 200 mm, red
LED:	Super bright LED numerals which last ever 100.000 hours in continual use
Horn:	uses horn from score board
Dimensions:	450 x 350 x 30 mm
Weight:	3 kg (each shot clock about 1.5 kg)
Power supply:	220 VAC-50Hz standard 12A circuit.

Control Unit:
Operation unit D-CKA with start and reset buttons, which will be used in conjunction with main ALGE-score board terminal.

System Includes:
- Two Shot Clocks, each with two digiit
- Power box
- Operation unit D-CKA
- Cableset

Option of wireless radio communication between Terminal and Shot Clock

ALGE-TIMING GmbH & Co, Rotkreuzstrasse 39, A-6890 Lustenau - AUSTRIA
Tel: +43-5577-85966 - Fax: +43-5577-85969 - office@alge-timing.com - www.alge-timing.com

23